


DL5.0C

DL5.0C is designed for residential and small commercial applications, with up to 50 units in parallel and an energy range from 5.12 kWh to 256 kWh. It supports 1C discharge rate. With high cycle times and a long lifespan, it ensures worry-free electricity consumption.

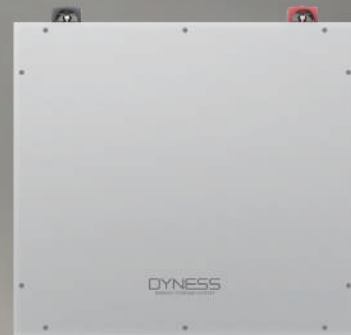

Flexible Expansion

Up to 50 units in parallel,
5.12kWh--256kWh capacity



1C Discharge

Simultaneously supplying power
to multiple loads, no need to
worry about power outages



Automatic Self-heating

-20°C to 55°C operating tempera-
ture (optional)



Easy Installation

Support wall-mounted, floor-mount-
ed, stacked and rack-mounted
installations, high space utilization



Long-term Reliability

LFP cells, 8000+ cycles, 7 years
warranty



All-round Safety

Short-circuit lockout, surge-resistant,
safe and reliable

Model	DL5.0C
Battery Type	LiFePO ₄
Nominal Battery Energy	5.12 kWh
Nomina Capacity	100Ah
Nominal Voltage	51.2V
Operating Voltage	44.8~57.6V
Recomended Charge & Discharge C Rate	0.5C
Maximum Discharge C rate	1C
Recommended Charge/Discharge Current	50A
Max. Charge/Discharge Current	Charge 75A Discharge 100A
Peak Discharge Current	110A(15s)
Depth of Discharge (DOD)	90%
Net Weight	49.9kg
Dimension[W/D/H](mm)	558*545*150 mm
Charging Temp. Range	0~55°C/-20~55°C (with heating function)
Discharging Temp. Range	-20~55°C
Communication	CAN/RS485/RS232
Cycle Life *	≥8000 Cycles/ 7 Years
Protection Level	IP20
WIFI Module	Optional
Expansion	Up to 50 units in parallel
Certification & Safety Standard	UN38.3/CE-EMC/IEC62619/CEI-021/GOST-R
Compatible Inverterst	Solis/Deye/Luxpower/Voltronic/Hoymiles/Growatt/Goodwe/SMA/Victron/Ingeteam/Delios/SAJ/APS etc.

* Test conditions: 0.2C Charging & Discharging. @25°C, 90% DOD
Note: This specification is only suitable for Southeast Asia

